

LED Module
Modular Platform Engine Series

T-Type Gen2

with LH351C



Samsung outdoor modules enable flexible modular design, providing better solution for outdoor application

Features & Benefits

- High lumen density of 3200 lm (5000K)
- Seamless combination by modular design
- Lens-type module, that makes fixtures easily designed
- IP66 for durability and robustness



Applications

Outdoor Lighting:

- Roadway Light
- Street Light
- Parking Lot
- Tunnel Light
- Flood Light
- Canopy Light

SAMSUNG

Table of Contents

1.	Product Code Information	-----	3
2.	Characteristics	-----	4
3.	Structure & Assembly	-----	6
4.	Certification & Declaration	-----	8
5.	Label Structure	-----	9
6.	Packing Structure	-----	11
7.	Precautions in Handling & Use	-----	12

1. Product Code Information

Light Distribution (Optical Lens Type)	Nominal CCT	Product Code	Remark
IESNA Type II Medium	3000K	SL-P7V2W62MCGL	
	4000K	SL-P7T2W62MCGL	
	5000K	SL-P7R2W62MCGL	
IESNA Type V	3000K	SL-P7V2W65SCGL	
	4000K	SL-P7T2W65SCGL	
	5000K	SL-P7R2W65SCGL	

2. Characteristics

a) Maximum Rating

Item	Rating	Unit	Remark
Rated Lifetime	>50,000	hour	L80B50 @ Ts < 105 °C
Ingress Protection (IP)	IP66	-	
Ambient Operating Temperature	-40 ~ 70	°C	
Storage Temperature (T_a)	-30 ~ +70	°C	
ESD	±8 kV (contact) / ±15 kV (air)	kV	
Working Voltage for Insulation	50	V	

※ T_a : Ambient Temperature

b) Electro-optical Characteristics (I_F = 700 mA, t_p = 70 °C)


Item	Unit	Nom. CCT	CRI	Min.	Typ.	Max.	Remark
Luminous Flux	lm	3000K	70	2620	2910	-	
		4000K		2780	3100	-	
		5000K		2780	3190	-	
Luminous Efficacy	lm/W	3000K	70	-	144	-	
		4000K		-	153	-	
		5000K		-	158	-	
CCT	K	3000K	70	2750	2950	3300	
		4000K		3600	3900	4300	
		5000K		4450	4850	5300	
Color Rendering Index (Ra)	-	-	70	-	-	-	
Operating Current (I _F)	mA			-	700	1000	per module
Operating Voltage (V _F)	V dc			26	29	33.0	
Power Consumption (P)	W			-	20.3	25	@ 29 V, 700mA in a module

Notes:

- 1) T_c: Case temperature, measured at "T_{c point}" and at the rated typical DC current
- 2) Samsung maintains measurement tolerance of
: luminous flux = ±7 %, CRI = ±1, voltage = ±5%, CCT = ±5%, Current = ±5%
- 3) The maximum operating current means the highest limit in any operating condition
- 4) Voltage difference between modules is tightly controlled to be less than 1.0 V so that the maximum current of any module can be limited close to the value stated on above table (voltage bin of the module is printed at the labels on each module and on outer box)
- 5) The power consumption for a specific module is dependent on the operating voltage distribution across the modules in parallel connection

3. Structure & Assembly

a) Appearance

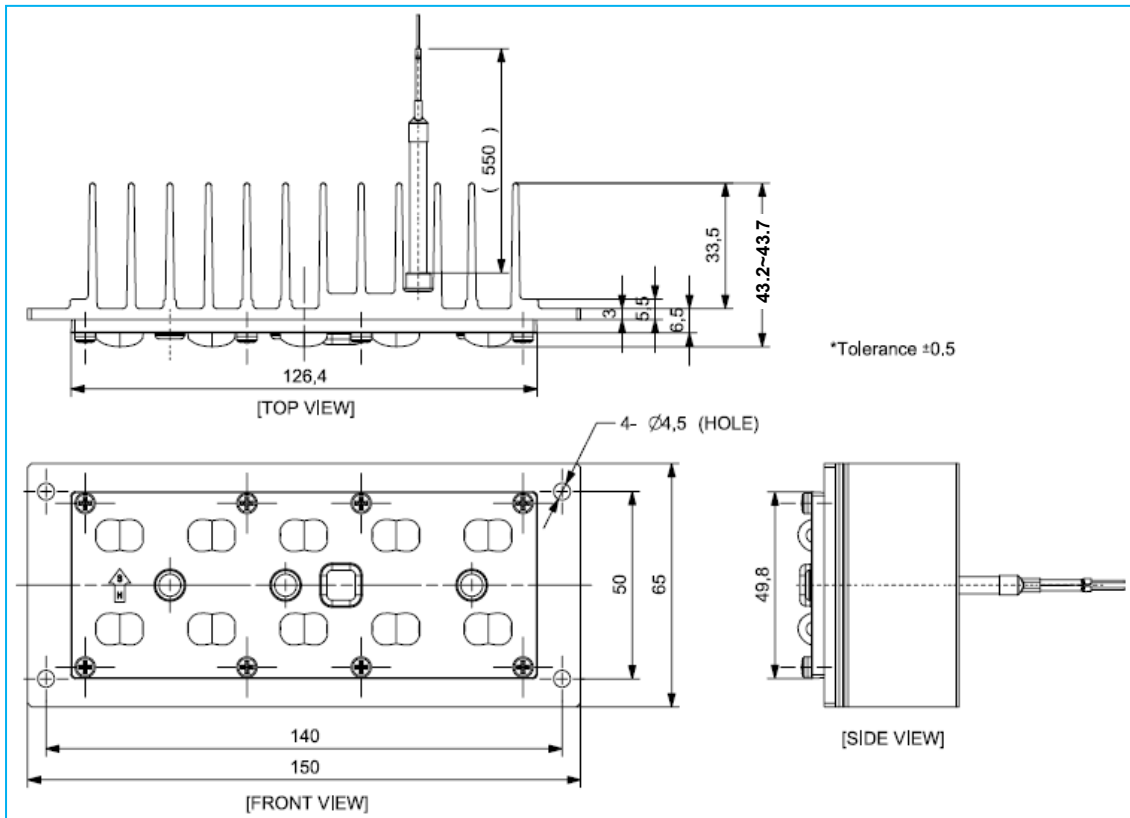


Note:

The appearance will be different for various optical solutions depending on the combination of the available core lenses. Critical dimensions are the same for all optical solutions, except for thickness difference at the core lens cross-section.

b) Dimension

Model	Dimension	Specification	Tolerance	Unit	Remark
T type Gen2 with 351C	Module Length	150	± 0.5	mm	Module heights differ from lens to lens
	Module Width	60	± 0.5	mm	
	Module Height	43.2~43.7	± 0.5	mm	
	PCB Thickness	1.15	± 0.1	mm	
	Module Weight	295	± 20	g	



c) Structure

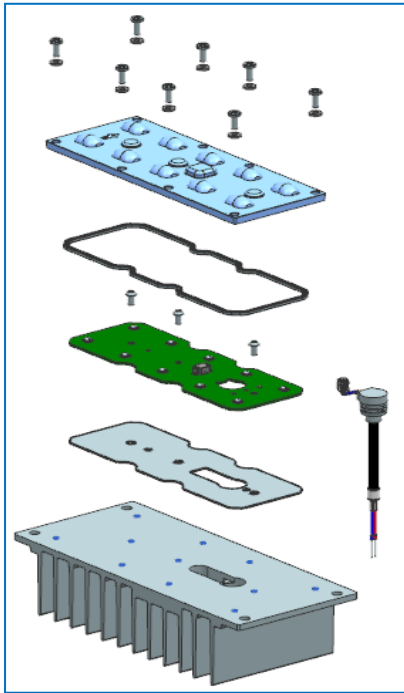



No.	Parts	Specifications
1.	Lens cover screws (8 pcs)	Material: Stainless steel with teflon washer Location: Between array lens cover and base plate heat sink
2.	Array lens cover	Material: Polycarbonate Thickness: 2.0 mm UL-94 Flammability: V-2
3.	Rubber seal	Material: Molded silicone
4.	LED board	LED: LH351C Ceramic high flux rank (10 pcs) Material: MC-PCB, aluminum Thickness: 1.15 mm Screws: Stainless steel (3 pcs)
5.	Side inlet harness	Material: Molded PVC coated with silicone sealant, 105 °C rating Wires: 24 AWG, 105 °C rating, without end connector Length (wires): 550 mm
6.	Thermal pad	Between PCB and base plate heat sink
7.	Base plate heat sink	Material: Extrusion aluminum

d) Light Distribution

IESNA Type II Medium Lens Type (2M)

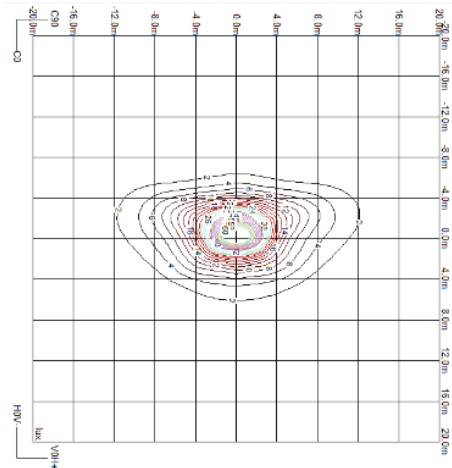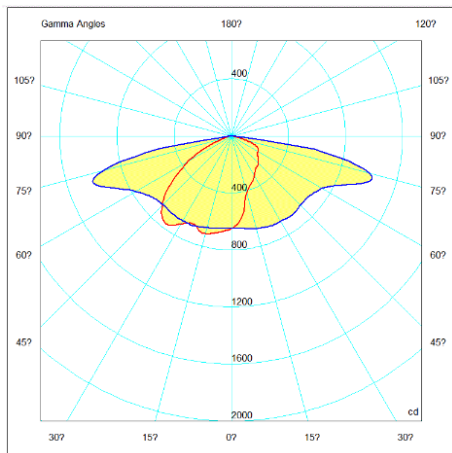


IESNA Type 5 Lens Type (5S)

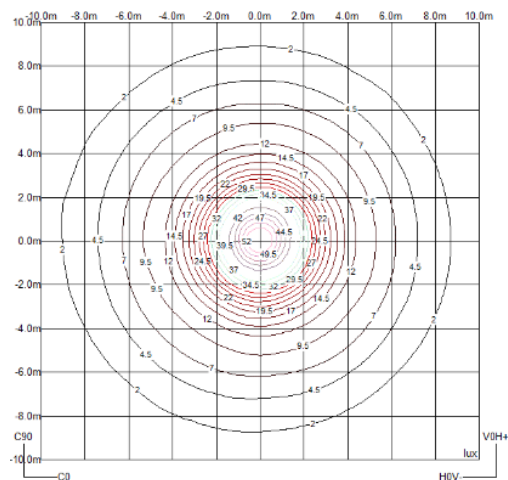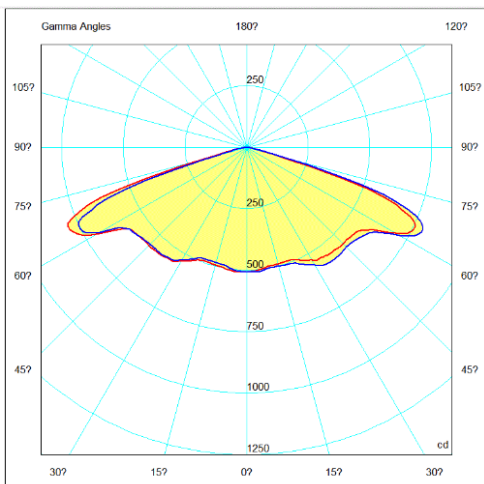


e) Thermal Management

Performance temperatures are measured on “Tc point” as indicated below (located at long side-center of the Module):

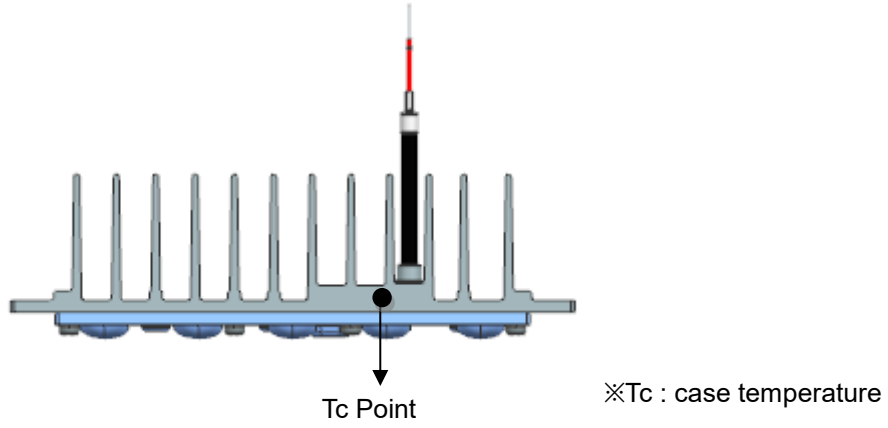

g) Schematic Circuit




4. Certification & Declaration

Item	Compliant to	Remark
Test & Certification	UL 8750	E344519
Declaration	RoHS	Hazardous Substance & Material

5. Label Structure

a) LED Board Label

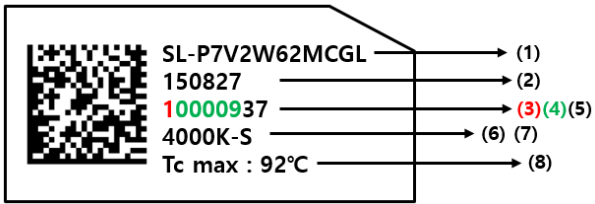

Number	Item	Description
①	Model Number (Product Code)	Refer to page 3
②	SMT Date Code	-
③	SMT Line	-
④	Serial Number	00001 ~ 99999
⑤	LED Binning Code	-
⑥	CCT	5000 K
⑦	LED Maker	S : Samsung
⑧	Tc max	92°C

b) Outer Box Label



Number	Item	Description
①	Model Number (Product Code)	Refer to page 3
②	Lot No.	-
③	Packing Quantity	12
④	Production Date (year & week)	-
⑤	Country of Origin	-
⑥	Production Date (year / month / date)	-

6. Packing Structure


Packing Process

Step 1: 6 Modules of the same voltage bin are placed inside a stack:

Step 2: Two stacks of module (totaling 12 Modules) are placed inside one outer box:



Step 3: 40 boxes (480 modules) are placed on one pallet:

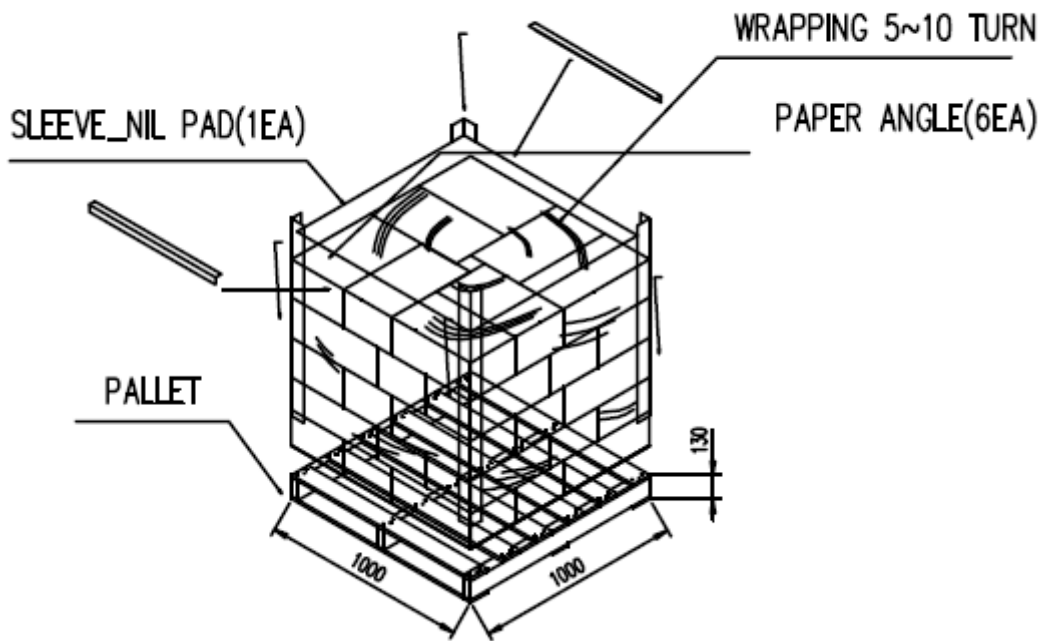

Packing	Quantity (modules)	Dimension (mm)			
		Length	Width	Height	Tolerance
Out Box	12	419	240	171	±5
Pallet	480	1000	1000	130	±10

7. Precautions in Handling & Use

7.1. The LED Lighting Modules for white light are devices which are materialized by combining white LEDs. The color of white light can differ a little unusually to diffuser plate (sign-board panel). Also when the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.

7.2. Handling

To prevent the LED Lighting Modules from making any defectives, please handle the LED Lighting modules with care as follows.

- (1) Don't drop the unit and don't give the unit any shocks.
- (2) Don't bend the PCB and don't touch the LED Resin.
- (3) Don't storage the Module in a dusty place or room.
- (4) Don't take the product apart.
- (5) Don't touch the LED and also PCB and other circuit parts of Module with your naked fingers or sharpness things.
- (6) Take care so that do not pull wire with hand in case of carries or moves LED Lighting Modules.
- (7) *VOCs can be generated from adhesives, flux, hardener or organic additives used in luminaires. This phenomenon can cause a significant loss of light emitted from the luminaires. In order to prevent these problems, we recommend users to know the physical properties of the materials used in luminaires, and they must be selected carefully.
(*VOCs: Volatile Organic Compounds)

7.3. Cleaning

The LED Lighting Modules should not be used in any type of fluid such as water, oil, organic solvent, etc.

It is recommended that IPA (Isopropyl Alcohol) be used as a solvent for cleaning the LED Lighting Modules.

When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Freon solvents should not be used to clean the LEDs because of worldwide regulations. Do not clean the LED Lighting Modules by the ultrasonic. Before cleaning, a pre-test should be done to confirm whether any damage to the LED Lighting modules will occur.

7.4. Static Electricity

Static electricity or surge voltage damages the LED Lighting Modules. Please keep the working process anti-static electricity condition to prevent the Lighting from destroying, as following.

- (1) Anyone who handles the unit should be well grounded.(earth ring or anti-static glove)
- (2) Anyone who handles the unit should wear anti-electrostatic working clothes.
- (3) All kinds of device and instruments, such as working table, measuring instruments and assembly jigs in your production lines should be well grounded.

7.5. Storage

The LED Lighting Modules must be stored to insert a package of a moisture absorbent material(silica gel) in a box.

7.6. Others

If over voltage which exceeds the absolute maximum rating is applied to LED Lighting Modules.

It will cause damage Circuits(that LED is included) and result in destruction.

Do not directly look into lighted LED with naked eyes.

Please use this product within 5 months, which is kept in its original packaging unopened when stocked.

Legal and additional information.

[About Samsung Electronics Co., Ltd.](#)

Samsung inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com

Copyright © 2020 Samsung Electronics Co., Ltd. All rights reserved.

Samsung Electronics reserves the right to modify, at its sole discretion, the design, packaging, specifications, and features shown herein without notice at any time.

Samsung Electronics Co., Ltd.
1, Samsung-ro, Giheung-gu,
Yongin-si, Gyeonggi-do, 17113
KOREA

www.samsung.com/led/

SAMSUNG